




LINE ROLLER MOD. UK

This cross arm mounted roller, offering reliable performance during overhead line installation. Its dual-pin holding mechanism allows the top roller to be opened from either side, making conductor insertion quick, safe, and highly efficient—ideal for work where accessibility and workflow speed are critical.

The uplift roller is manufactured from abrasion-resistant, long-life nylon, ensuring smooth operation and excellent durability under continuous use. The main roller is constructed from hardened alloy steel and mounted on a free-running ball-race suspension, which significantly reduces tractive effort and minimizes conductor drag. To withstand harsh outdoor environments, the high-quality steel frame is fully hot-dip galvanised after manufacture, providing exceptional corrosion resistance.

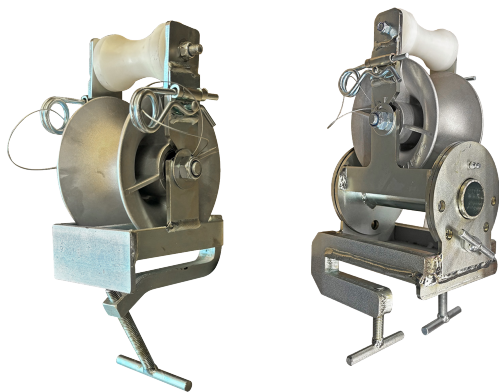

MODELL UK - STRAIGHT

680-160

Standard model for straight pulls.



MODELL UK - ANGLE

680-170

The roller can rotate through 180° with five fixed positions: +90°, -90°, +45°, -45°, and 0°. This adjustment range allows the unit to accommodate all types of angled pulling operations with optimal alignment and reduced friction.

Technical Data	
Article ID	680-160
Weight	3,2 kg
Max. Load	300 kg
Max. Cable Ø	Appr. 50 mm
Material	Galvanized Steel / Nylon
Brand	Sahlins Sweden

Technical Data	
Article ID	680-170
Weight	9,0 kg
Max. Load	500 kg
Max. Cable Ø	Appr. 50 mm
Material	Galvanized Steel / Nylon
Brand	Sahlins Sweden

